


**F D W TYPE**

◀ 規格品

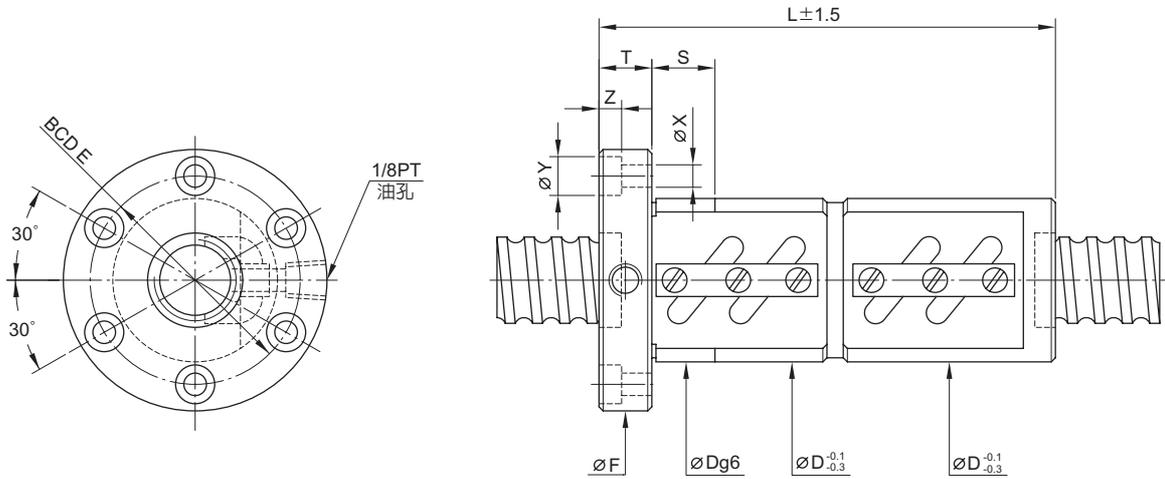

型號	規格		珠徑	珠卷數	剛性 Kg <sub>f</sub> /μm K	動負荷 C (kg <sub>f</sub> )	靜負荷 Co (kg <sub>f</sub> )	螺帽		法蘭		法蘭孔			接觸 面長			
	公稱 外徑	導程						D	L	F	T	BCD-E	X	Y		Z	S	
16-5B2	16	5	3.175	2.5x2	65	1385	2799	40	110	64	12	51	5.5	9.5	5.5	24		
16-5B1				2.5x1	32	763	1400	40	80	64	12	51	5.5	9.5	5.5	24		
16-5C1				3.5x1	46	1013	1946	40	90	64	12	51	5.5	9.5	5.5	24		
20-5B1	20	6	3.969	2.5x1	38	837	1733	44	80	68	12	55	5.5	9.5	5.5	24		
20-5B2				2.5x2	76	1519	3465	44	110	68	12	55	5.5	9.5	5.5	24		
20-6B1				2.5x1	40	1139	2187	48	92	72	12	59	5.5	9.5	5.5	24		
20-6C1	20	6	3.969	3.5x1	55	1512	3041	48	104	72	12	59	5.5	9.5	5.5	24		
25-5A2				1.5x2	54	1092	2622	50	102	73	11	61	5.5	9.5	5.5	24		
25-5B1				2.5x1	46	939	2209	50	80	74	12	62	5.5	9.5	5.5	24		
25-5B2	25	5	3.175	2.5x2	90	1704	4417	50	110	74	12	62	5.5	9.5	5.5	24		
25-5C1				3.5x1	68	1252	3085	50	90	74	12	62	5.5	9.5	5.5	24		
25-6B2				2.5x2	94	2304	5524	56	128	82	12	69	6.6	11	6.5	24		
25-6C1	25	6	3.969	3.5x1	66	1690	3844	56	104	82	12	69	6.6	11	6.5	24		
25-10B1				10	4.763	2.5x1	48	1592	3237	60	122	86	16	73	6.6	11	6.5	24
28-5B1				28	5	3.175	2.5x1	51	984	2466	55	80	85	12	69	6.6	11	6.5
28-5B2	2.5x2	98	1785				4932	55	110	85	12	69	6.6	11	6.5	24		
28-6A2	6	1.5x2	59				1150	2960	55	110	85	12	69	6.6	11	6.5	24	
28-6B2	28	6	3.969	2.5x2	98	1776	4980	55	123	85	12	69	6.6	11	6.5	24		
32-4B2				4	2.381	2.5x2	91	1071	3582	54	93	81	12	67	6.6	11	6.5	24
32-5B1				5	3.175	2.5x1	55	1039	2833	58	80	84	12	71	6.6	11	6.5	24
32-5B2	2.5x2	109	1886			5666	58	110	84	12	71	6.6	11	6.5	24			
32-5C1	3.5x1	76	1388			3967	58	90	84	12	71	6.6	11	6.5	24			
32-6B1	6	3.969	3.969	2.5x1	57	1409	3510	62	92	88	12	75	6.6	11	6.5	24		
32-6B2				2.5x2	112	2556	7020	62	128	88	12	75	6.6	11	6.5	24		
32-6C1				3.5x1	78	1888	4936	62	104	88	12	75	6.6	11	6.5	24		
32-8A2	32	8	4.763	1.5x2	70	2082	5151	66	135	100	15	82	9	14	8.5	30		
32-8B1				2.5x1	58	1810	4227	66	110	100	16	82	9	14	8.5	30		
32-8B2				2.5x2	115	3284	8453	66	158	100	16	82	9	14	8.5	30		
32-8B3	32	8	4.763	2.5x3	168	4653	12678	74	205	108	16	90	9	14	8.5	30		
32-8C1				3.5x1	82	2428	5948	66	126	100	16	82	9	14	8.5	30		
32-10A2				10	6.350	1.5x2	72	3051	6612	74	167	108	15	90	9	14	8.5	30
32-10B1	2.5x1	58	2651			5600	74	122	108	16	90	9	14	8.5	30			
32-10B2	2.5x2	118	4810			11199	74	182	108	16	90	9	14	8.5	30			
32-10C1	10	6.350	6.350	3.5x1	86	3519	7785	74	142	108	16	90	9	14	8.5	30		
32-12B1				2.5x1	62	2602	5510	74	153	108	18	90	9	14	8.5	30		
32-12B2				2.5x2	118	4810	11199	74	232	108	16	90	9	14	8.5	30		
32-12C1	12	6.350	6.350	3.5x1	84	3518	7784	74	166	108	16	90	9	14	8.5	30		

註: 表列剛性值, 在軸向負荷為10%動負荷之條件下計算。