


F D W TYPE

◀規格品

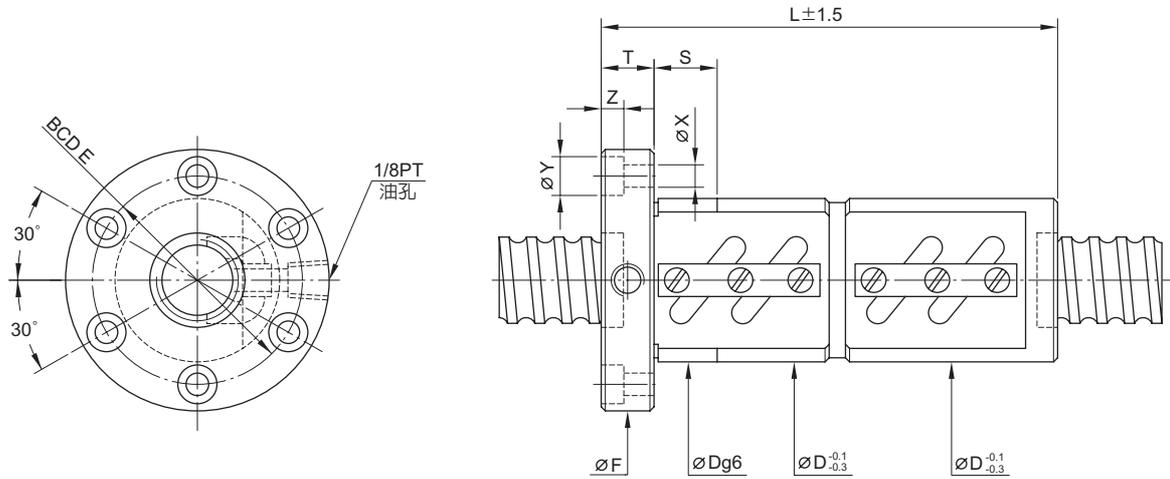

型號	規格		珠徑	珠卷數	剛性 Kg μ m K	動負荷 C (kgf)	靜負荷 Co (kgf)	螺帽		法蘭			法蘭孔			接觸 面長	
	公稱 外徑	導程						D	L	F	T	BCD-E	X	Y	Z		S
36-6B1	36	6	3.969	2.5x1	62	1486	3969	65	92	100	12	82	6.6	11	6.5	24	
36-6B2				2.5x2	121	2696	7937	65	128	100	12	82	6.6	11	6.5	24	
36-12A2		12	4.763	1.5x2	80	2557	6693	70	155	108	15	90	9	14	8.5	30	
36-12B1				2.5x1	67	2812	6334	75	126	120	16	98	11	17.5	11	30	
36-10B2		10	6.350	2.5x2	132	5105	12669	75	184	120	18	98	11	17.5	11	30	
36-12B2				2.5x2	130	5105	12668	75	206	120	18	98	11	17.5	11	30	
36-8A2		8	4.763	1.5x2	77	2217	5669	70	135	108	15	90	9	14	8.5	30	
36-8B2				2.5x2	126	3489	9606	70	158	108	15	90	9	14	8.5	30	
40-5B1		40	5	3.175	2.5x1	65	1141	3567	68	84	102	16	84	9	14	8.5	30
40-5B2					2.5x2	132	2071	7134	68	114	102	16	84	9	14	8.5	30
40-6B2	6		3.969	2.5x2	136	2817	8855	70	132	104	16	86	9	14	8.5	30	
40-8B1				8	4.763	2.5x1	69	2003	5302	74	110	108	16	90	9	14	8.5
40-8B2	2.5x2		137			3634	10603	74	158	108	16	90	9	14	8.5	30	
40-8B3	2.5x3		200			5150	15904	74	210	108	15	90	9	14	8.5	30	
40-8C1	3.5x1		96			2679	7438	74	126	108	16	90	9	14	8.5	30	
40-10A2	10		6.350	1.5x2	87	3418	8398	82	170	124	18	102	11	17.5	11	30	
40-10B1				2.5x1	72	2959	7069	84	132	125	18	104	11	17.5	11	30	
40-10B2				2.5x2	145	5370	14138	84	192	125	18	104	11	17.5	11	30	
40-10C1		3.5x1		102	3932	9841	84	152	125	18	104	11	17.5	11	30		
40-12A2	12	7.144	1.5x2	88	4006	9404	86	160	128	18	106	11	17.5	11	30		
40-12B1			2.5x1	70	3425	7837	86	153	128	18	106	11	17.5	11	40		
40-12B2			2.5x2	141	6217	15674	86	225	128	18	106	11	17.5	11	40		
40-12C1			3.5x1	103	4637	11146	86	179	128	18	106	11	17.5	11	30		
40-16A2	16	7.144	1.5x2	83	4007	9405	86	214	128	18	106	11	17.5	11	40		
40-16B1			2.5x1	72	3425	7837	86	182	128	18	106	11	17.5	11	40		
40-16B2			2.5x2	143	6216	15674	86	272	128	22	106	11	17.5	11	30		
45-10B1	45	10	6.350	2.5x1	76	3111	7953	88	134	132	18	110	11	17.5	11	30	
45-10B2				2.5x2	156	5655	15905	88	194	132	18	110	11	17.5	11	30	
45-12B2		12	7.938	2.5x2	162	7627	19799	96	230	142	22	117	13	20	13	40	
45-16B2				2.5x2	158	6636	17895	90	278	132	18	110	11	17.5	11	30	
50-5A2	50	5	3.175	1.5x2	96	1447	5382	80	107	114	16	96	9	14	8.5	30	
50-5A3				1.5x3	143	2051	8072	80	127	114	16	96	9	14	8.5	30	
50-6B2		6	3.969	2.5x2	161	3093	11149	84	134	118	16	100	9	14	8.5	30	
50-6B3				2.5x3	235	4384	16723	84	170	118	16	100	9	14	8.5	30	
50-8B1		8	4.763	2.5x1	81	2206	6705	87	112	128	18	107	11	17.5	11	30	
50-8B2				2.5x2	165	4004	13409	87	160	128	18	107	11	17.5	11	30	
50-8B3				2.5x3	244	5674	20114	87	208	128	18	107	11	17.5	11	30	
50-10B1				10	6.350	2.5x1	88	3245	8918	93	133	135	18	113	11	17.5	11

註:表列剛性值,在軸向負荷為10%動負荷之條件下計算。