


F S W TYPE

◀ 規格品

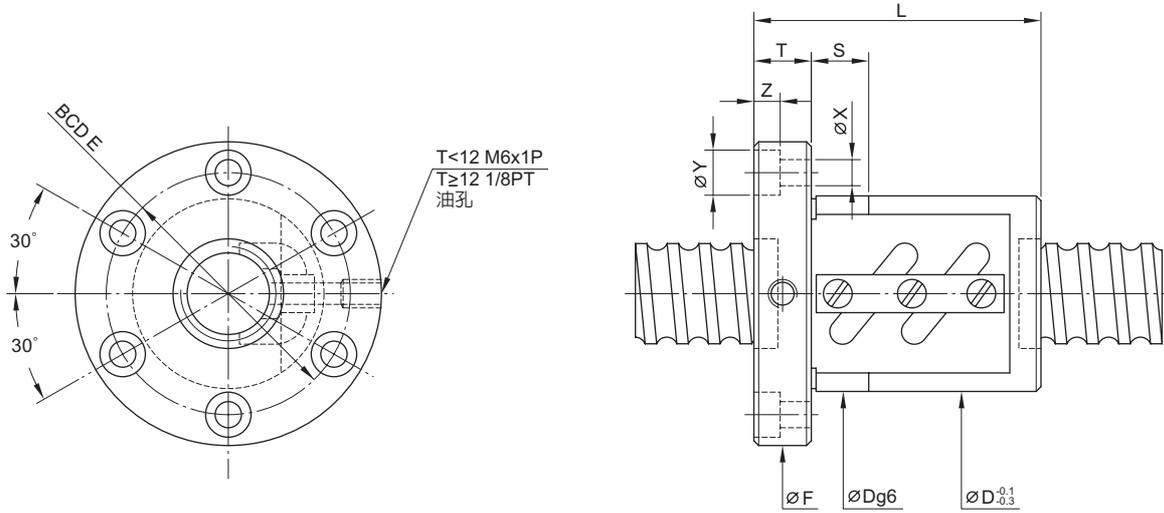

型號	規格		珠徑	珠卷數	剛性 Kgf/μm K	動負荷 C (kgf)	靜負荷 Co (kgf)	螺帽		法蘭			法蘭孔			接觸 面長	
	公稱 外徑	導程						D	L	F	T	BCD-E	X	Y	Z		S
12-4B1	12	4	2.381	2.5x1	8	383	638	30	38	50	10	40	4.5	8	4	12	
12-4C1				3.5x1	9	511	893	30	44	50	10	40	4.5	8	4	12	
12-5B1		5		2.5x1	8	383	638	30	40	50	10	40	4.5	8	4	12	
14-5B1	14		2.5x1	10	710	1216	34	40	57	11	45	5.5	9.5	5.5	12		
15-10A1	15	10	3.175	1.5x1	9	474	781	34	48	57	11	45	5.5	9.5	5.5	12	
15-20A1		20		1.5x1	9	474	781	34	62	58	12	45	5.5	9.5	9.5	12	
16-4B1	16	4	2.381	2.5x1	14	439	870	34	38	57	11	45	5.5	9.5	5.5	12	
16-5B1				5	2.5x1	16	763	1400	40	45	64	12	51	5.5	9.5	5.5	12
16-5B2		2.5x2			33	1385	2799	40	60	64	12	51	5.5	9.5	5.5	12	
16-5C1	20	5	3.175	3.5x1	22	1013	1946	40	50	64	12	51	5.5	9.5	5.5	12	
20-5B1				2.5x1	19	837	1733	44	45	68	12	55	5.5	9.5	5.5	12	
20-5B2		2.5x2		39	1519	3465	44	60	68	12	55	5.5	9.5	5.5	12		
20-6B1	6	3.969	3.969	2.5x1	20	1137	2187	48	48	72	12	59	5.5	9.5	5.5	12	
20-6C1				3.5x1	28	1512	3041	48	66	72	12	59	5.5	9.5	5.5	12	
25-4B2	25	4	2.381	2.5x2	38	976	2776	46	48	69	11	57	5.5	9.5	5.5	12	
25-5B2				5	2.5x2	46	1704	4417	50	60	74	12	62	5.5	9.5	5.5	12
25-5C1		3.5x1			35	1252	3085	50	50	74	12	62	5.5	9.5	5.5	12	
25-6B1		6		2.5x1	24	1255	2735	53	44	76	11	64	5.5	9.5	5.5	12	
25-6B2				2.5x2	48	2308	5523	56	68	82	12	69	6.6	11	6.5	12	
25-6C1		3.5x1		35	1690	3844	56	55	82	12	69	6.6	11	6.5	12		
25-10B1	10	4.763	4.763	2.5x1	25	1592	3237	60	65	86	16	73	6.6	11	6.5	12	
25-10B2				2.5x2	46	2888	6472	58	97	85	15	71	6.6	11	6.5	12	
25-12B1				12	3.969	2.5x1	24	1271	2761	53	60	78	11	64	6.6	11	6.5
28-5B1	28	5	3.175	2.5x1	26	984	2466	55	45	85	12	69	6.6	11	6.5	12	
28-5B2				2.5x2	50	1785	4932	55	60	85	12	69	6.6	11	6.5	12	
28-6A2		6		1.5x2	29	1150	2960	55	55	85	12	69	6.6	11	6.5	12	
28-12B2				12	2.5x2	51	3060	7299	60	110	86	12	73	6.6	11	6.5	12
28-16B1	16	4.763	2.5x1	25	1686	3649	62	84	89	12	75	6.6	11	6.5	12		
32-5B2	32	5	3.175	2.5x2	55	1886	5666	58	60	84	12	71	6.6	11	6.5	12	
32-5C1				3.5x1	39	1388	3967	58	50	84	12	71	6.6	11	6.5	12	
32-6B2		6		3.969	2.5x2	56	2556	7020	62	68	88	12	75	6.6	11	6.5	12
32-6C1					3.5x1	39	1888	4936	62	55	88	12	75	6.6	11	6.5	12
32-8B2		8		4.763	2.5x2	59	3284	8453	66	86	100	16	82	9	14	8.5	15
32-8C1					3.5x1	41	2428	5948	66	70	100	16	82	9	14	8.5	15
32-10B2		10		6.350	2.5x2	60	4810	11199	74	98	108	16	90	9	14	8.5	15
32-10C1					3.5x1	44	3519	7785	74	78	108	16	90	9	14	8.5	15
32-12A2		12		6.350	1.5x2	37	3051	6612	74	97	108	18	90	9	14	8.5	15
32-12B2					2.5x2	59	4810	11199	74	110	108	18	90	9	14	8.5	15

註:表列剛性值,在軸向負荷為30%動負荷之條件下計算。