


性能曲線 50Hz

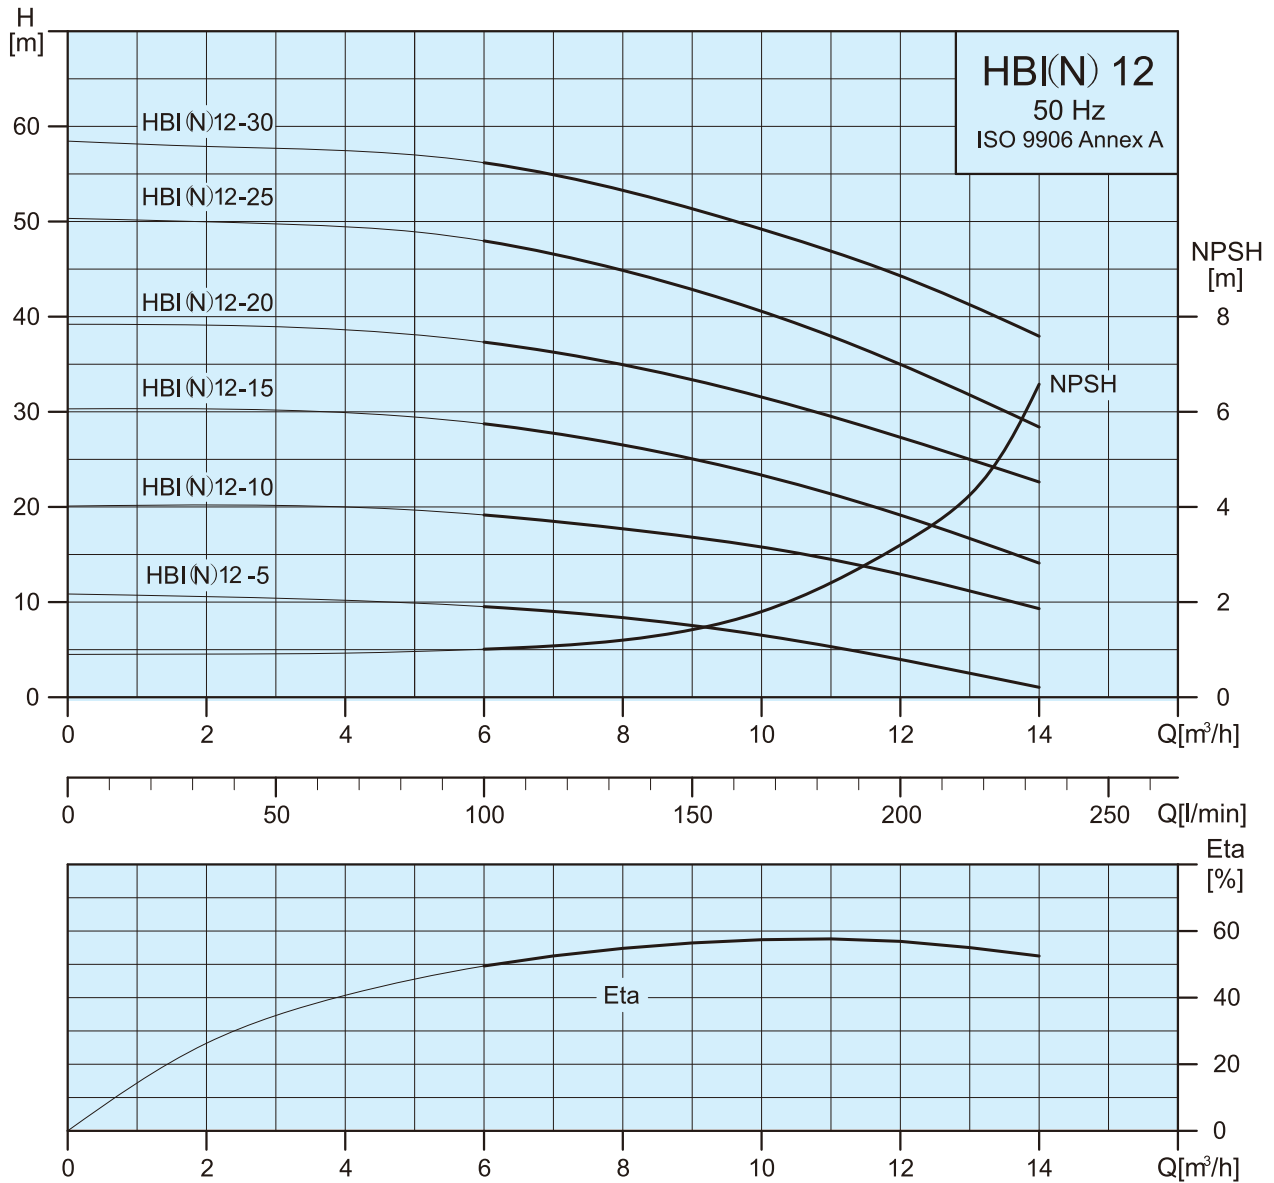

馬達數據, 2850min⁻¹

| 泵浦型式 | 1x220-240 V | | 3x220-240/380-415 V | |
|---------------|--------------------|----------------------|---------------------|----------------------|
| | P ₁ [W] | I _{1/1} [A] | P ₁ [W] | I _{1/1} [A] |
| HBI/HBN 12-05 | - | - | 550 | 2.6 / 1.5 |
| HBI/HBN 12-10 | 1200 | 5.5 | 1210 | 4.3 / 2.5 |
| HBI/HBN 12-15 | 1700 | 7.8 | 1680 | 5.9 / 3.4 |
| HBI/HBN 12-20 | 2460 | 11 | 2410 | 7.4 / 4.3 |
| HBI/HBN 12-25 | 2900 | 13 | 2870 | 9.2 / 5.3 |
| HBI/HBN 12-30 | - | - | 3640 | 11.6 / 6.7 |