


F D W TYPE

◀ 規格品

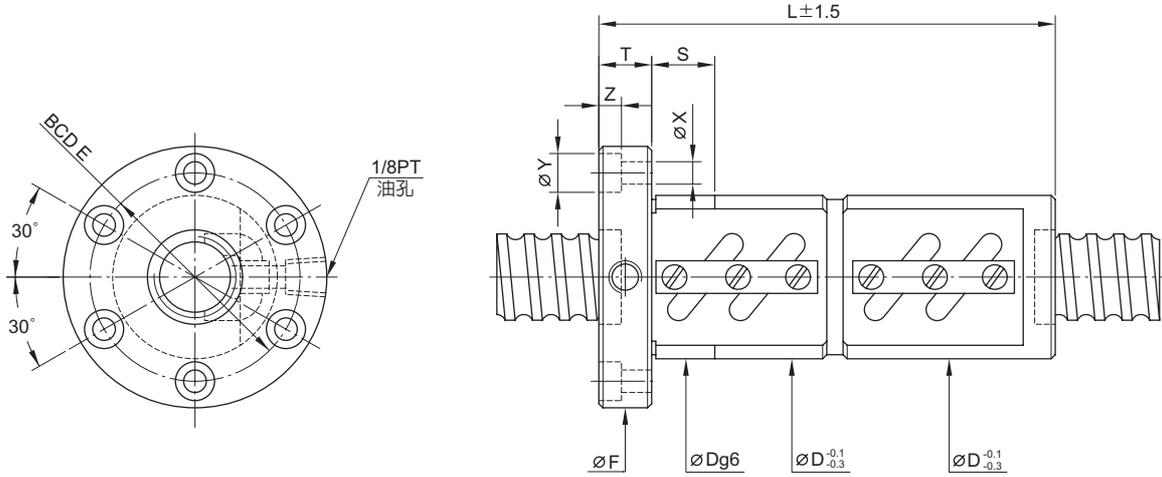

| 型號 | 規格 | | 珠徑 | 珠卷數 | 剛性 Kgf/μm K | 動負荷 C (kgf) | 靜負荷 Co (kgf) | 螺帽 | | 法蘭 | | | 法蘭孔 | | | 接觸 面長 | | |
|----------|----------|-------|-------|-------|-------------------|----------------|-----------------|-------|-------|-----|-----|-------|-----|------|------|----------|------|----|
| | 公稱 外徑 | 導程 | | | | | | D | L | F | T | BCD-E | X | Y | Z | | S | |
| 50-10B2 | 50 | 10 | 6.350 | 2.5x2 | 173 | 5923 | 17670 | 94 | 194 | 135 | 18 | 114 | 11 | 17.5 | 11 | 30 | | |
| 50-10B3 | | | | 2.5x3 | 255 | 8394 | 26505 | 94 | 254 | 135 | 18 | 114 | 11 | 17.5 | 11 | 30 | | |
| 50-10C1 | | 3.5x1 | 120 | 4393 | 12481 | 94 | 154 | 135 | 18 | 114 | 11 | 17.5 | 11 | 30 | | | | |
| 50-12B1 | | 12 | 7.938 | 2.5x1 | 90 | 4367 | 10918 | 100 | 159 | 146 | 22 | 122 | 14 | 20 | 13 | 40 | | |
| 50-12B2 | | | | 2.5x2 | 178 | 8022 | 22094 | 102 | 232 | 150 | 22 | 125 | 13 | 20 | 13 | 40 | | |
| 50-12C1 | | | | 3.5x1 | 123 | 5875 | 15380 | 102 | 184 | 150 | 22 | 125 | 13 | 20 | 13 | 40 | | |
| 50-16B2 | | | | 2.5x2 | 174 | 7918 | 21837 | 100 | 280 | 146 | 22 | 122 | 14 | 20 | 13 | 40 | | |
| 50-20B1 | | 20 | 2.5x1 | 90 | 4367 | 10918 | 100 | 227 | 146 | 28 | 122 | 14 | 20 | 13 | 40 | | | |
| 55-10C1 | 55 | 10 | 6.350 | 3.5x1 | 132 | 4562 | 13661 | 100 | 154 | 140 | 18 | 118 | 11 | 17.5 | 11 | 40 | | |
| 55-12B2 | | 12 | 7.938 | 2.5x2 | 185 | 8392 | 24390 | 105 | 232 | 154 | 22 | 127 | 13 | 20 | 13 | 40 | | |
| 63-8A2 | 63 | 8 | 4.763 | 1.5x2 | 107 | 2826 | 10129 | 104 | 142 | 146 | 18 | 124 | 11 | 17.5 | 11 | 40 | | |
| 63-8A3 | | | | 1.5x3 | 154 | 4004 | 15193 | 104 | 174 | 146 | 18 | 124 | 11 | 17.5 | 11 | 40 | | |
| 63-10B2 | | 10 | 6.350 | 2.5x2 | 206 | 6533 | 22371 | 110 | 196 | 152 | 20 | 130 | 11 | 17.5 | 11 | 30 | | |
| 63-10B3 | | | | 2.5x3 | 305 | 9258 | 33556 | 110 | 256 | 152 | 20 | 130 | 11 | 17.5 | 11 | 30 | | |
| 63-12B2 | | | | 12 | 7.938 | 2.5x2 | 214 | 8943 | 28062 | 118 | 232 | 166 | 22 | 141 | 13 | 20 | 13 | 40 |
| 63-16B2 | | | | 16 | 9.525 | 2.5x2 | 280 | 14862 | 46009 | 124 | 296 | 172 | 22 | 147 | 13 | 20 | 13 | 40 |
| 63-20B2 | | 20 | 2.5x2 | 280 | | 14862 | 46009 | 124 | 334 | 172 | 22 | 147 | 13 | 20 | 13 | 40 | | |
| 70-10B2 | | 70 | 10 | 6.350 | 2.5x2 | 228 | 6843 | 25011 | 124 | 196 | 170 | 20 | 145 | 13 | 20 | 13 | 40 | |
| 70-10B3 | 2.5x3 | | | | 334 | 9698 | 37516 | 124 | 256 | 170 | 20 | 145 | 13 | 20 | 13 | 40 | | |
| 70-12B2 | 12 | | 7.938 | 2.5x2 | 236 | 9382 | 31275 | 130 | 232 | 178 | 22 | 152 | 13 | 20 | 13 | 40 | | |
| 70-12B3 | | | | 2.5x3 | 336 | 13296 | 46912 | 130 | 302 | 178 | 22 | 152 | 13 | 20 | 13 | 40 | | |
| 70-20B2 | | | | 20 | 9.525 | 2.5x2 | 300 | 15644 | 51502 | 130 | 325 | 186 | 28 | 158 | 18 | 26 | 17.5 | 60 |
| 80-10B2 | 80 | 10 | 6.350 | 2.5x2 | 251 | 7202 | 28538 | 130 | 200 | 178 | 22 | 152 | 13 | 20 | 13 | 40 | | |
| 80-10B3 | | | | 2.5x3 | 368 | 10207 | 42807 | 130 | 260 | 178 | 22 | 152 | 13 | 20 | 13 | 40 | | |
| 80-12B2 | | 12 | 7.938 | 2.5x2 | 257 | 9797 | 35422 | 136 | 232 | 185 | 22 | 159 | 13 | 20 | 13 | 40 | | |
| 80-12B3 | | | | 2.5x3 | 380 | 13884 | 53132 | 136 | 302 | 185 | 22 | 159 | 13 | 20 | 13 | 40 | | |
| 80-16B2 | | | | 16 | 9.525 | 2.5x2 | 340 | 16485 | 58851 | 145 | 302 | 210 | 28 | 174 | 18 | 26 | 17.5 | 50 |
| 80-16B3 | | | | | | 2.5x3 | 498 | 23363 | 88276 | 145 | 398 | 210 | 28 | 174 | 18 | 26 | 17.5 | 50 |
| 80-20B2 | | 20 | 9.525 | 2.5x2 | 338 | 16485 | 58851 | 145 | 345 | 210 | 28 | 174 | 18 | 26 | 17.5 | 50 | | |
| 80-20B3 | | | | 2.5x3 | 498 | 23363 | 88276 | 145 | 470 | 210 | 28 | 174 | 18 | 26 | 17.5 | 50 | | |
| 100-12B2 | | 100 | 12 | 7.938 | 2.5x2 | 301 | 10761 | 44596 | 160 | 240 | 224 | 28 | 188 | 18 | 26 | 17.5 | 50 | |
| 100-12B3 | | | | | 2.5x3 | 452 | 15251 | 66894 | 160 | 312 | 224 | 28 | 188 | 18 | 26 | 17.5 | 50 | |
| 100-16B2 | 16 | | 9.525 | 2.5x2 | 400 | 18123 | 74425 | 170 | 308 | 248 | 32 | 205 | 22 | 32 | 21.5 | 60 | | |
| 100-16B3 | | | | 2.5x3 | 595 | 25684 | 11637 | 170 | 404 | 248 | 32 | 205 | 22 | 32 | 21.5 | 60 | | |
| 100-20B2 | | | | 20 | 9.525 | 2.5x2 | 400 | 18123 | 74425 | 170 | 350 | 248 | 32 | 205 | 22 | 32 | 21.5 | 60 |
| 100-20B3 | | | | | | 2.5x3 | 595 | 25684 | 11637 | 170 | 475 | 248 | 32 | 205 | 22 | 32 | 21.5 | 60 |

註：表列剛性值，在軸向負荷為10%動負荷之條件下計算。